

Fixing Instructions

March 2012

Version 1.3

HALIFAX

Art No. 64123095



Fixing Instructions:

Thank you for purchasing this HiB product. Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference

- 1) Position the mirror in a suitable location (according to the zonal diagram below-left), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
- 2) Carefully mark the position of the mirror using a soft pencil.
- 3) Remove the mirror and mark the mounting points according to the diagram on the left. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.**
- 4) Before drilling, ensure there are no hidden cables or pipes behind the mounting points. Using a masonry drill, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
- 5) Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
- 6) Slide the mirror upwards, so that it detaches from the frame.
- 7) **Ensure the domestic electrical mains supply to which the mirror is being connected is turned off.** Feed the domestic mains supply wire through the grommet on the mirror frame.
- 8) Hold the frame in position, and screw through the holes in the frame into the wall plugs.
- 9) Connect the domestic mains supply to the terminal box according to the wiring diagram below-left.
- 10) Slide the mirror onto the frame so that it becomes secure.

Bulb Replacement:

-   Requires 2 x T8 bulbs, Maximum 18 Watts

CAUTION: The surface of the bulb may become extremely hot! Allow at least 30 minutes after bulb failure before replacing...


- 1) Turn off the mains electrical supply and disconnect the wiring between the mains electrics and the mirror.
- 2) Slide the mirror upwards, so that it detaches from the frame.
- 3) Carefully grasp the failed bulb and rotate 90° anti-clockwise to remove the bulb from the bulb holder.
- 4) Carefully push the replacement bulb into the bulb holder and rotate 90° clockwise to secure.
- 5) Slide the mirror onto the frame so that it becomes secure.

Operating Instructions:

- To turn illumination on or off, operate the pull cord located at the bottom of the mirror.



Product Care:

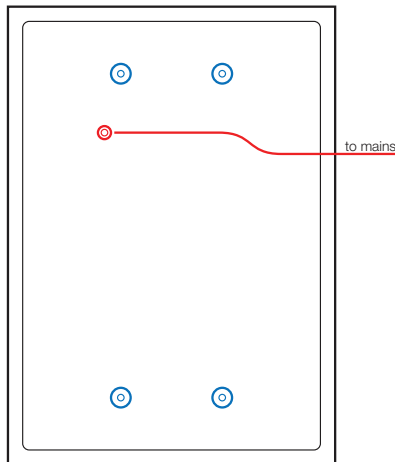- Do not use abrasives or solvents when cleaning this product.
- Wipe off all water spillages as soon as possible using a soft, damp cloth.




REAR VIEW
● mounting points
● electrical input



This product is suitable for installation in zones:  

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of bathroom lighting. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

Wiring Diagram

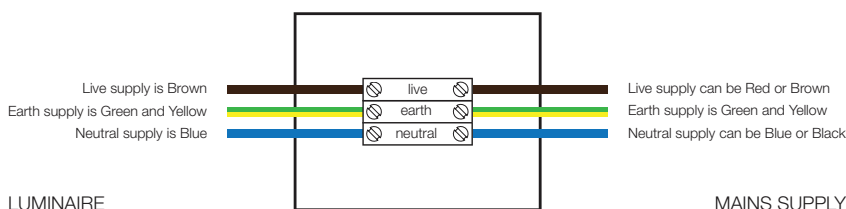

LUMINAIRE

MAINS SUPPLY



WEEE compliance - must not be mixed with general household waste



HiB Ltd, Castle House, 21-23 Station Road, New Barnet, Herts, EN5 1PH
t. 020 8441 0352 f. 020 8441 0219 e. sales@hib.co.uk w. www.hib.co.uk

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.